

VSB 215

The VSB215 is a compact 2 x 15" subwoofer with a surprising amount of punch! It has a superb clean sound and is very powerful in subsonic frequencies. Our "V" internal structure makes this box extremely strong and minimises the standing waves which cause booming in other designs. Its low weight means it only takes one person to load it in and out of trucks and venues. It is also small enough to be hidden under the stage in smaller venues.

The VSB215 is designed for use in smaller clubs and hire situations where its compact size and weight are key. It is also suitable for drum and side fill applications on stage when used in conjunction with the ASYM series. Built in is a "top hat" for sub-pole-mid/high configurations and interlocking runners to facilitate secure stacking when used in multiples.

With a usable frequency range from 35Hz up to 200Hz a single VSB215 can produce 99db SPL @1w/1m with a maximum continuous SPL of 130dB. Using 4 VSB215's stacked the bass couples delivering the potential of 134dB peak.



features:

- compact size / weight
- clean powerful bass
- high SPL output
- built in wheels
- "top hat" mount
- hand crafted




applications:

- indoor / outdoor
- install / tour
- club and venue
- event and conferencing

permanent installations in:

- auditoriums
- theatres
- clubs and bars
- places of worship




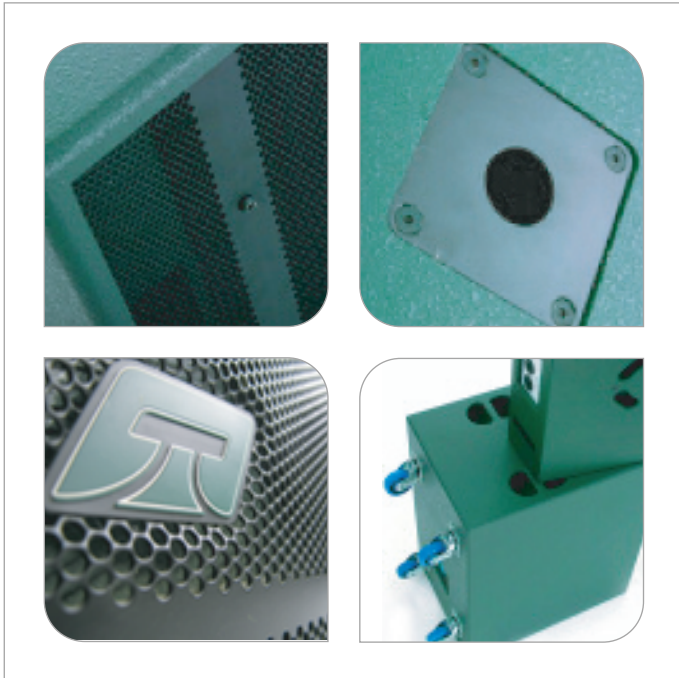

specifications

Type	MEDIUM THROW SUBWOOFER
Frequency response	35Hz - 200Hz +/-3db
Driver	2 x 15" 4" voice coil dual suspension vented gap
Power rating	2 x 1000W AES
Recommended amplifier	2500W @4 ohms
Sensitivity	99dB @1w/1m
Maximum SPL	130dB
Nominal impedance	2 x 8 ohms
Dispersion	100 x 80
Recommended x-over	80Hz - 150Hz
Connectors	2 x Neutrik NL4 Speakons
Dimensions	Height 530mm, width 925mm, depth 890mm
Weight	80Kg
Construction	Hand crafted in birch ply and finished with water resistant durable coating. Protective grill and transport wheels fitted as standard.

overall dimensions

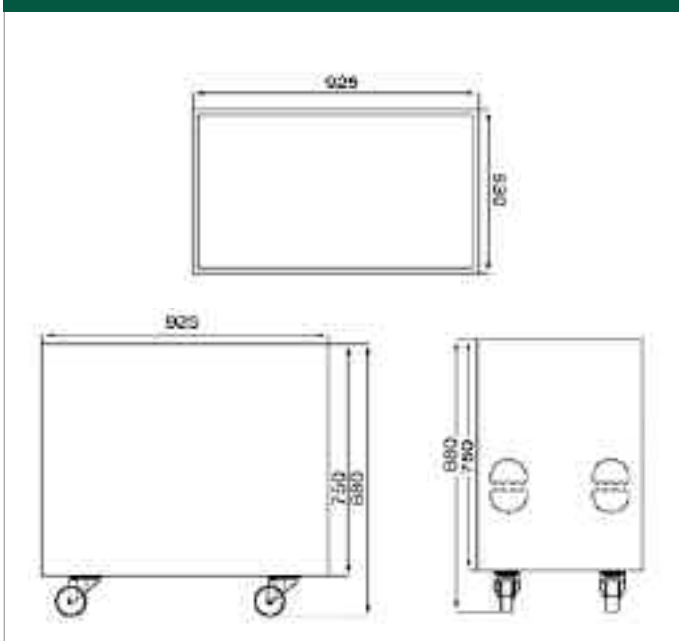

VSB215 shown with the ASYM3

